



KH Mobility

K-TIGER


Rapid, Powerful, Safe Rescue and Stylish
Form design and practicality to safety and convenience.
We create new standards for ambulance.



K-TIGER Ambulance

Ambulance Swift, Safe, Secure

K-Tiger is a leading ambulance brand know for its innovative, reliable, and high-tech emergency vehicle, ensuring top-tier patient transport and care.

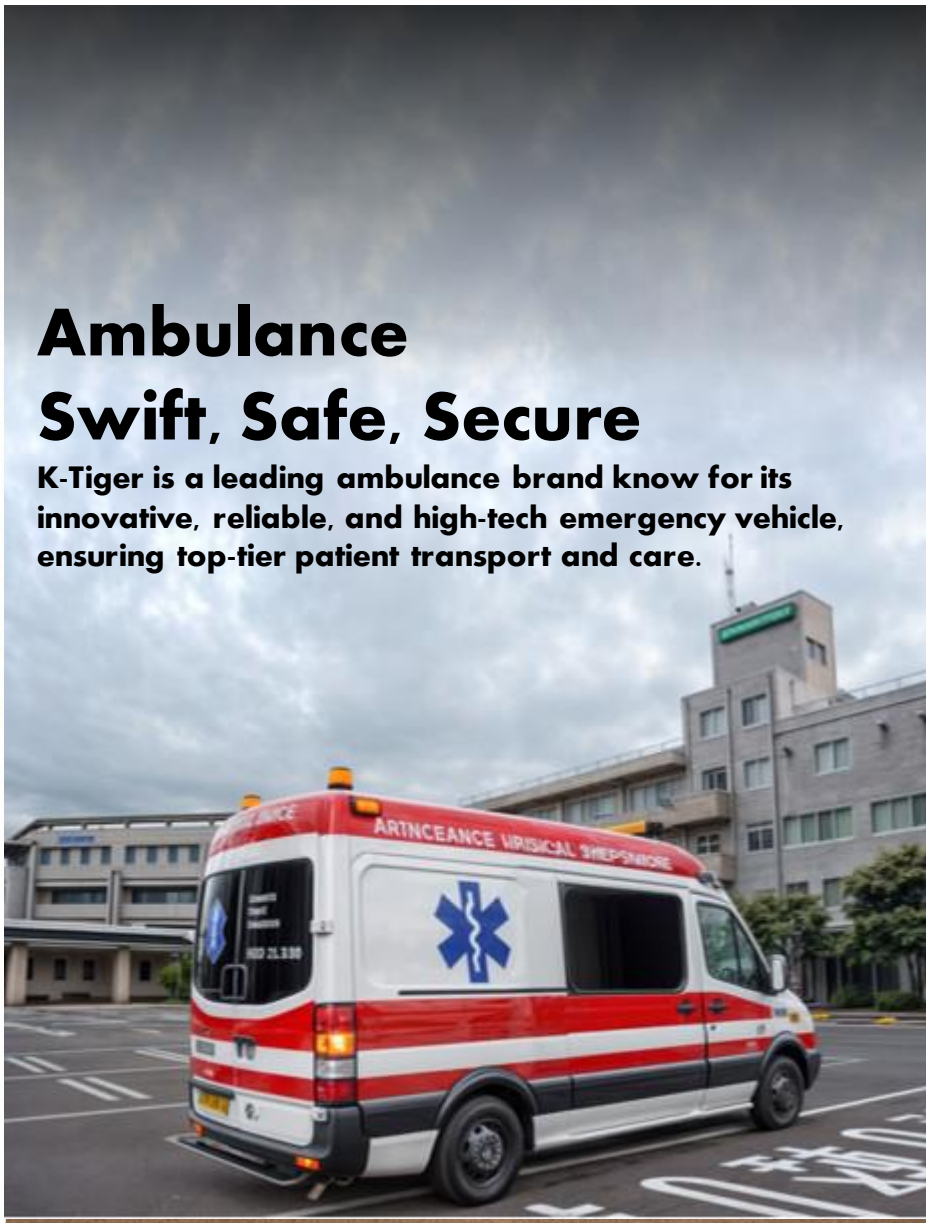

SPECIFICATION

K - TIGER mini bus				
BASIC SPECIFICATIONS		EXC	EXM	EXG
Seat		6 - 18 seats	6 - 23 seats	6 - 28 seats
A/C System		12,000 Kcal powerful air conditioner		
Gross Vehicle Weight (GVM)(kg)		4,400	5,000	5,000
Height	Low - Deck (A/C)	2,360 (2,530)	2,360 (2,530)	2,360 (2,530)
	High - Deck (A/C)	2,620(2,800)	2,620(2,800)	2,620(2,800)
Wheel Base (mm)		3,665	4,325	4,325
TREAD (Single)	Front	1,700	-	-
	Rear	1,720	-	-
TREAD (Double)	Front	1,689	1,689	1,689
	Rear	1,525	1,525	1,525
Overhang (mm)	Front	1,025	1,025	1,012
	Rear	1,228	1,590	2,140
Min. Turning Diameter (m)		13.5	16	16
BODY & SUSPENSION SYSTEM				
Body structure		LHD / RHD		
Front Suspension type		Spring independent suspension		
Rear Suspension type		LEAF SPRING (2/3 pcs)	LEAF SPRING (3 pcs)	LEAF SPRING (3 pcs)
Rear Axle Load Capacity (KG)	Single tyre	2,500	-	-
	Double tyre	3,500	3,500	3,500
Tyre	Single tyre	215/75R16, 225/75R16	-	-
	Double tyre	195/75R16, 205/75R16	195/75R16, 205/75R16	195/75R16, 205/75R16

Two Roof Hights



Exterior



The K-TIGER ambulance is equipped with an efficient first aid system and offers optimal convenience to protect the patient's life.

Interior



Oxygen System



Wall mount-type medicine cabinet



Passenger Bench



Doctor chair



Oxygen tank for medication



Medicine Cabinet



Folding Chair



Adjustable light, LED lamp and ventilation

Standard Specification

- Air conditioner
- Power Steering
- Warning Lamp
- Power Steering
- Ventilation
- Power Steering
- adjustable light



Fixed type main stretcher
(Standard specifications)



Sub stretcher
(Standard specifications)



Link type mail stretcher
(Optional)